

## DIGITAL THREE POINTS INTERNAL MICROMETER


- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with setting rings
- Optional accessory: SPC cable (page A1-A2)

### Individual

Code	Range	Accuracy	Setting ring	L
3127-2	2-2.5mm	4μm	Ø2.5mm	12.5mm
3127-3	2.5-3mm	4μm	Ø2.5mm	12.5mm
3127-4	3-4mm	4μm	Ø4mm	22.5mm
3127-5	4-5mm	4μm	Ø5mm	22.5mm
3127-6	5-6mm	4μm	Ø6mm	22.5mm

### Set

Code	Range	Micrometers included	Setting ring
3127-232	2-3mm	2-2.5mm, 2.5-3mm	Ø2.5mm
3127-363	3-6mm	3-4mm, 4-5mm, 5-6mm	Ø4mm, Ø5mm, Ø6mm



3127-4



## DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting rings and extension rods
- Optional accessory: SPC cable (page A1-A2)


### Individual

Code	Range	Accuracy	Setting ring	Extension rod
3127-8	6-8mm	4μm	Ø6mm	100mm
3127-10	8-10mm	4μm	Ø8mm	100mm
3127-12	10-12mm	4μm	Ø10mm	100mm


### Set

Code	Range	Micrometers included	Setting ring	Extension rod
3127-123	6-12mm	6-8mm, 8-10mm, 10-12mm	Ø6mm, Ø8mm, Ø10mm	100mm

Unit: mm




3127-12



## DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with setting rings and extension rods
- Optional accessory: SPC cable (page A1-A2)

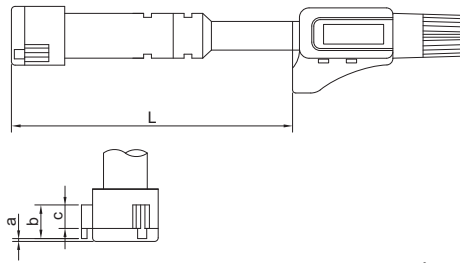

### Individual

Code	Range	Accuracy	Setting ring	Extension rod	L	a	b	c
3127-16	12-16mm	4µm	Ø16mm	150mm	80	0.5	6	4.5
3127-20	16-20mm	4µm	Ø16mm	150mm	80	0.5	6	4.5
3127-25	20-25mm	4µm	Ø25mm	150mm	90	0.5	8	6
3127-30	25-30mm	4µm	Ø25mm	150mm	90	0.5	8	6
3127-40	30-40mm	4µm	Ø40mm	150mm	97	0.5	14	12
3127-50	40-50mm	5µm	Ø40mm	150mm	97	0.5	14	12
3127-63	50-63mm	5µm	Ø62mm	150mm	114	0.5	17.5	14.5
3127-75	62-75mm	5µm	Ø62mm	150mm	114	0.5	17.5	14.5
3127-88	75-88mm	5µm	Ø87mm	150mm	114	0.5	17.5	14.5
3127-100	87-100mm	5µm	Ø87mm	150mm	114	0.5	17.5	14.5

### Set


Code	Range	Micrometers included	Setting ring	Extension rod
3127-202	12-20mm	12-16mm, 16-20mm	Ø16mm	150mm
3127-504	20-50mm	20-25mm, 25-30mm, 30-40mm, 40-50mm	Ø25mm, Ø40mm	150mm
3127-1004	50-100mm	50-63mm, 62-75mm, 75-88mm, 87-100mm	Ø62mm, Ø87mm	150mm



3127-40



setting ring




extension rod


## DIGITAL THREE POINTS INTERNAL MICROMETER

- Resolution 0.001mm/0.00005"
- Each micrometer has two sets of interchangeable jaw for different measuring ranges
- IP54 dust/waterproof
- Buttons: on/off, set, mm/inch, ABS/INC
- RS232 data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet stop
- Supplied with extension rods
- Optional accessory: SPC cable (page A1-A2), setting ring (code 6312)


Code	Range	Accuracy	Extension rod
3127-125	100-125mm	5µm	150mm
3127-150	125-150mm	5µm	150mm
3127-175	150-175mm	5µm	150mm
3127-200	175-200mm	5µm	150mm
3127-225	200-225mm	7µm	150mm
3127-250	225-250mm	7µm	150mm
3127-275	250-275mm	7µm	150mm
3127-300	275-300mm	7µm	150mm



extension rod



interchangeable jaws

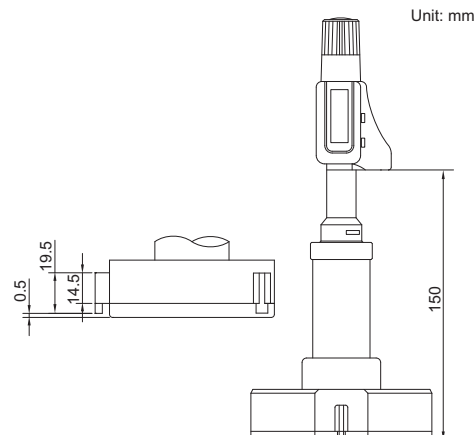

3127-125